


***Effect of Gas Metal Arc Welding Parameters on the Behaviour
of Heat Affected Zone of 316L SS and A572 gr. 50 steel***

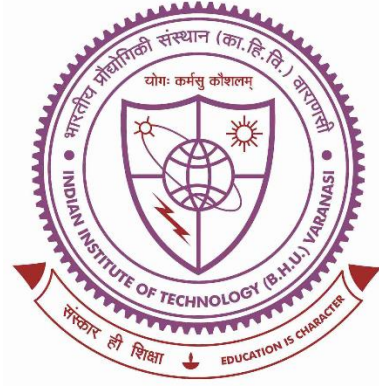

Thesis submitted in partial fulfilment

for the award of degree

Doctor of Philosophy

By

Manish Deo

**Department of Mechanical Engineering
Indian Institute of Technology
(Banaras Hindu University)
Varanasi-221005**

CERTIFICATE

This is to certify that the revised thesis entitled "Effect of Gas Metal Arc Welding Parameters on the Behaviour of Heat Affected Zone of 316L SS and A572 gr. 50" is being submitted by Mr./Ms./Mrs. Manish Dco in partial fulfilment for the award of Ph.D. in the Department /School of Mechanical Engineering IIT(BHU), Varaansi is a record of bonafide work carried out by him/her.

Date of Submission:



DR. SATYA PRAKASH TEWARI
(Academic Supervisor)



DR. GIRIJA SHANKAR MAHOBIA
(Co-supervisor)
सह-आचार्य


Associate Professor
धातुकीय अभियान्त्रिकी विभाग
Department of Metallurgical Engg.
भारतीय प्रौद्योगिकी संस्थान (काशी हिन्दू विश्वविद्यालय)
Indian Institute of Technology (Banaras Hindu University)
वाराणसी-२२१००५/Varanasi-221005



DR. JOY PRAKASH MISRA
(Administrative Supervisor)

Assistant Professor
Deptt. of Mechanical Engg.
Indian Institute of Technology (IIT)
Varanasi-221005

Forwarded by:



HoD/CoS
(Signature with seal)

विभागाध्यक्ष / HEAD

यांत्रिक अभियान्त्रिकी विभाग/Deptt. of Mechanical Engg.
भारतीय प्रौद्योगिकी संस्थान / Indian Institute of Technology
(का०हि०वि०/B.H.U.)

वाराणसी-२२१००५/Varanasi-221005

CERTIFICATE

It is certified that the work contained in the thesis titled "*Effect of Gas Metal Arc Welding Parameters on the Behaviour of Heat Affected Zone of 316L SS and A572 gr. 50*" by "*Manish Deo*" has been carried out under our supervision and this work has not been submitted elsewhere for a degree.


It is further certified that the student has fulfilled all the requirements of Comprehensive Examination, Candidacy and SOTA for the award of Ph.D. Degree.



Academic Supervisor

Dr. Satya Prakash Tewari

Department of Mechanical Engineering
Indian Institute of Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA.



Administrative Supervisor

Dr. Joy Prakash Misra

Department of Mechanical Engineering
Indian Institute of Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA.
Assistant Professor
Deptt. of Mechanical Engg.
Indian Institute of Technology (BHU)
Varanasi-221005



Co-Supervisor

Dr. Girija Shankar Mahobia

Department of Metallurgical Engineering
Indian Institute of Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA
सह-आचार्य

Associate Professor


धातुकीय अभियांत्रिकी विभाग
Department of Metallurgical Engg.
भारतीय प्रौद्योगिकी संस्थान (काशी हिन्दू विश्वविद्यालय)
Indian Institute of Technology (Banaras Hindu University)
वाराणसी-२२१००५/Varanasi-221005

DECLARATION BY THE CANDIDATE

I, "**MANISH DEO**", certify that the work embodied in this thesis is my own bona fide work and carried out by me under the supervision of "**Prof. SATYA PRAKASH TEWARI, Dr. GIRIJA SHANKAR MAHOBIA and Dr. JOY PRAKASH MISRA**", from **SEPTEMBER 2015** to **DECEMBER 2021**, at the "**DEPARTMENT OF MECHANICAL ENGINEERING**", Indian Institute of Technology (BHU), Varanasi. The matter embodied in this thesis has not been submitted for the award of any other degree/diploma. I declare that I have faithfully acknowledged and given credits to the research workers wherever their works have been cited in my work in this thesis. I further declare that I have not wilfully copied any other's work, paragraphs, text, data, results, etc., reported in journals, books, magazines, reports dissertations, theses, etc., or available at websites and have not included them in this thesis and have not cited as my own work.

Date: 19/7/22

Place: Varanasi


(Manish Deo)

CERTIFICATE FROM THE SUPERVISORS

This is to certify that the above statement made by the candidate is correct to the best of our knowledge.



Academic Supervisor

Dr. Satya Prakash Tewari
Department of Mechanical
Engineering
Indian Institute of
Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA



Administrative Supervisor

Dr. Joy Prakash Misra
Department of Mechanical
Engineering
Assistant Professor
Deptt. of Mechanical Engg.
Indian Institute of
Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA




Co-Supervisor

Dr. Girija Shankar Mahobia
Department of Metallurgical
Engineering
Indian Institute of
Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA
सह-आचार्य

Associate Professor

धातुकीय अभियांत्रिकी विभाग
Department of Metallurgical Engg.
भारतीय प्रौद्योगिकी संस्थान (काशी हिन्दू विश्वविद्यालय)
Indian Institute of Technology (Banaras Hindu University)
Varanasi – 221005 / Varanasi-221005


Professor and Head
Department of Mechanical Engineering
Indian Institute of Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA

विभागाध्यक्ष / HEAD

यांत्रिक अभियांत्रिकी विभाग / Deptt. of Mechanical Engg.
भारतीय प्रौद्योगिकी संस्थान / Indian Institute of Technology
(काशी हिन्दू विश्वविद्यालय / B.H.U.)

वाराणसी-221005

COPY RIGHT TRANSFER CERTIFICATE

Title of the Thesis: Effect of Gas Metal Arc Welding Parameters on the Behaviour
of Heat Affected Zone of 316L SS and A572 gr. 50 steel

Name of the Student: Manish Deo

Copyright Transfer

The undersigned hereby assigns to the Indian Institute of Technology (Banaras Hindu University) Varanasi all rights under copyright that may exist in and for the above thesis submitted for the award of the "*DOCTOR OF PHILOSOPHY*".

Date: 19/07/22

Place: Varanasi



(MANISH DEO)

Note: However, the author may reproduce or authorize others to reproduce material extracted verbatim from the thesis or derivative of the thesis for author's personal use provided that the source and the Institute's copyright notice are indicated.

Table of Contents

Preface	i
Acknowledgements.....	v
List of Tables.....	vii
List of Figures	viii
INTRODUCTION.....	(1-17)
1.1 Introduction	2
1.2 Arc Welding Processes.....	3
1.3 Heat Affected Zone generation in welding	4
1.4 Arc Welding Process Variables.....	6
1.4.1 Primary Variables.....	7
1.4.2 Secondary Variables.....	8
1.5 Optimization of Process Parameters of Welded Joints	9
1.6 GMAW application for welding Steels.....	10
1.7 Characteristics of A572 and Stainless Steels	13
1.8 Differences between A572 gr. 50 steel and 316L Stainless steel:	15
1.9 Motivation/ Need for the research work	15
LITERATURE REVIEW.....	(18-60)
2.1 Introduction	19
2.2 Gas Metal Arc Welding (GMAW).....	20
2.2.1 GMAW Basic Welding Circuit	20
2.2.2 GMAW Welding Process parameters	21
a) Welding Current (I).....	22
b) Arc Voltage (V).....	23
c) Weld Speed/ Arc Travel Speed (s).....	24

d)	Shielding Gas and its flow rate (f)	27
e)	Heat Input (HI).....	32
2.2.3	Metal transfer in GMAW	38
a)	Short-Circuit Metal Transfer.....	38
b)	Globular metal transfer.....	39
c)	Spray Transfer.....	39
d)	Pulsed Current transfer.....	40
2.2.4	Heat Transfer and Metallurgical Changes in GMAW	41
2.2.5	Weld Metal and Heat Affected Zone	45
a)	Weld Metal (WM).....	46
b)	Heat Affected Zone (HAZ)	48
2.2.6	Heat treatment of Welded joints.....	53
2.2.7	Optimization in welding.....	56
2.2.8	Observation from literature review/ Research gap.....	59
2.2.9	Aim and Objectives of the present work.....	60
MATERIALS AND METHOD.....		(61-74)
3.1	Introduction	62
3.2	Research Methodology.....	62
3.3	Material Selection for Base Materials, Filler Wire and Shielding Gas.....	64
3.3.1	Base Materials A572 grade 50	65
3.3.2	Base Materials 316L Stainless Steel	66
3.3.3	Filler Material.....	66
3.3.4	Shielding Gas	67
3.4	Fabrication of A572 grade 50 and 316L Stainless Steel	67
3.4.1	Finding the limits of the experiment through trial runs.	70

3.4.2	Finding the Levels of Experimentation	70
3.5	Characterization	72
3.5.1	Optical Metallography.....	72
3.5.2	Microhardness	73
3.5.3	Tensile Test	73
3.5.4	Scanning Electron Microscopy (SEM)	74
RESULTS AND DISCUSSION.....		(75-153)
4.1	Optimization of Process Parameters for A572 gr. 50.....	76
4.1.1	Evaluation of Signal to Noise (S/N) Ratio	78
4.1.2	Analysis of Variance (ANOVA).....	82
4.2	Heat Input effect on Welded joint of A572 gr. 50	85
4.3	Macrostructural evaluations of A572 gr. 50.....	86
4.4	Microstructural evolution of A572 gr. 50	90
4.4.1	Effect of Heat input	97
4.4.2	Effect of Welding current.....	103
4.4.3	Effect of Shielding Gas flow rate	104
4.4.4	Effect of welding speed.....	106
4.5	Mechanical Properties of A572 gr. 50 Weld joint	107
4.5.1	Hardness Distribution in HAZ and WB for A572 gr. 50	107
4.5.2	Tensile Properties of A572 gr. 50 Weld joint	111
4.6	Optimization of 316L SS Weld joint using Taguchi's approach	116
4.6.1	Evaluation of Signal to Noise (S/N) Ratio	117
4.6.2	Analysis of Variance (ANOVA).....	121
4.7	Effect of Heat Input on 316L SS Weld joint.....	124
4.8	Macrostructural evaluations of 316L SS Weld joint.....	125

4.9	Microstructural evolution of 316L SS Weld joint.....	128
4.9.1	Effect of Heat input	132
4.9.2	Effect of Welding current.....	137
4.9.3	Effect of Shielding Gas flow rate	139
4.9.4	Effect of welding speed.....	141
4.10	Mechanical Properties of 316L SS Weld joint.....	142
4.10.1	Hardness Distribution in HAZ and WB for 316L SS.....	142
4.10.2	Tensile Properties of 316L SS Weld joint.....	147
	Summary.....	153
	SUMMARY AND CONCLUSIONS.....	(154-160)
5.1	Summary of thesis	155
5.2	Future Perspectives	159

References

List of Publications

PREFACE

Welding is a process of joining two or more pieces of the same or dissimilar materials, which are melted together by the application of heat or pressure or both and with or without adding a filler material to obtain monolithic structures (Connor 1987). Often a filler material is added to facilitate coalescence. Welding is primarily used in metal parts and their alloys. Recent technologies behind welding have enormously created opportunities to add more value to welded structures and products. A few typical examples are automobiles, aircraft, ships, locomotives, space shuttles, and offshore platforms, to name but a few. Metals predominate the structures, and the quest for the use of metals in manufacturing innovative products by utilizing welding as the main joining process is highly indispensable. To meet the stringent requirements and demanding service conditions of aircraft, missiles, aerospace, automobiles, and commercial structural fields, it is not only necessary to develop new materials but also methods to fabricate them into useful components repeatedly. One such fabrication technique is the arc welding process.

A572 and 316L stainless steel possess some unique properties like strength and corrosion resistance, making it versatile for hazardous environments. A572 micro-alloyed /high strength low alloy steel is becoming the most popularly used as a replacement for mild steel with the added advantage of slightly more protection from corrosion. At the same time, stainless steel is a preferred choice for hazardous environment applications like the food and chemical processing industry. With the increased use of these steels in industries, a reliable joining technique and finding the variables compromising the joint integrity needs to be developed for time and cost-effectiveness. Gas Metal Arc Welding (GMAW) is the most extensive gas shielded arc welding process used in the joining of structural applications due to its preferable

flexibility and economy. But there are a few problems like catastrophic failure in heat affected zone, low welding speed, partial penetration, and lack of the deposited metal that occurred during this process. Due to uneven heating and cooling cycles during welding, excessive heat and stress are experienced. Its microstructure and mechanical properties become different from the base material and create heterogeneity in metallurgical structure. HAZ is often an area where failures can occur as it is a highly stressed region. The need for optimum welding parameters in terms of metallurgical uniformity is always required.

Hence in this research, an attempt has been made to find optimum welding parameters, parameters with reduced HAZ size and maximize the mechanical properties of the GMAW welded joints by the different welding parameters. In this investigation, the emphasis was to observe the HAZ and weld bead variations, morphology and microstructure with respect to different current and travel speed combinations under a shielding gas mixture of Argon (Ar) and Carbon dioxide (CO₂).

Butt joint welding in a single pass is performed on A572 gr. 50 and 316L SS steel plates at different combinations of input parameters like Welding Current (A), Weld speed(mm/sec), and Gas flow rate (l/min). MIG joints were fabricated using an inert gas with the help of automated welding machines. The joints were evaluated by conducting tensile tests using the universal testing machine, and interface hardness was found using Vickers hardness testing equipment. Microscopic examinations and characterizations of the joints have been done using Optical Microscopy (OM), X-ray radiography and Scanning Electron Microscopy (SEM).

The present investigation aimed to study the heat-affected zone and the effect of Gas Metal Arc Welding parameter on microstructural and mechanical properties. The characteristics of the fusion zone are typical coarse columnar grains structure because of

the prevailing thermal conditions during weld metal solidification. HAZ contained the soft zone, which is the result of the grain coarsening effect for higher heat input parameters, particularly in CGHAZ, resulting in the reduction of strength levels. In this work, plates of 5mm thickness have been used as the base material for preparing single pass butt welded joints at different current, gas flow rate and weld speed values. The filler wire used for joining the plates has a matching composition or is slightly over alloyed to counter the loss of alloying elements during welding. From this investigation, it was found that the hardness of the CGHAZ zone was degraded significantly due to the high heat input. Optimum parameters for both welded materials were found by Taguchi analysis and ANOVA, indicating current as the most dominating parameter, followed by weld speed and gas flow rate affecting the strength properties.

Organization of the thesis-: The thesis is classified into five chapters.

Chapter 1 gives a brief introduction to the various types of welding processes, their classifications, materials and its applications. It also describes the GMAW welding Process, Heat Affected Zone generation and its components in brief. The material chosen for this investigation, the problems encountered in the welding of steels and the HAZ of a welded joint are briefly discussed. The motivation of the research work and objectives of the research work is also presented in this chapter. The chapter concludes with a detailed investigation of Gas Metal Arc Welding (GMAW) and Heat Affected Zone (HAZ) as a critical area prone to defects and discontinuities.

Chapter 2 reviews the various literature on GMAW pertaining to the present investigation. A brief survey is carried out on the welding and HAZ effect on the mechanical behaviour of A572 gr. 50 and 316L SS joint. Based on the available literature effect of process parameters on bead profile characteristics has been reviewed. Further, the formation of heat affected zone and metallurgical aspects of welding low carbon steel

and austenitic stainless steel are discussed. Literature related to the variation of process parameters and optimization techniques for better strength and microstructural characteristics has been reviewed and presented. The chapter concludes with a discussion of conclusions from the literature and the objectives of the present investigation.

Chapter 3 discusses the details of materials and experimental procedures adopted for the weld properties investigation. The entire workflow chart and its various tests are also presented in this chapter. It also deals with the chemical and mechanical properties of the base material and filler wire selection. A detailed description of the experimental setup, Taguchi's approach, different levels of shielding gas and its flow rate, welding procedure and testing methods are also presented. The chapter concludes with the details of L₁₆ orthogonal array used and characterization techniques involved for the present investigation.

Chapter 4 enumerates the effect of welding parameters such as current, gas flow rate, weld speed and heat input on the mechanical and metallurgical properties of GMAW joints. This chapter focuses on the analysis of fabricated A572 gr. 50 and 316L SS welded joints under premixed shielding gas of Ar and CO₂. Taguchi's experimental design was used for optimization, and the effect of input variables was analyzed, followed by validation. The performance of joints was addressed in terms of macrostructure, microstructural features, and mechanical behaviour for maximum strength. Heat affected zone of joints were thoroughly analyzed for their contribution.

Chapter 5 summarizes the results obtained and the findings of the present investigation along with concluding remarks and scope for future work.

ACKNOWLEDGEMENTS

I am using this opportunity to express my sincere thanks and gratitude beyond words to my supervisors, Prof. S. P. Tewari, Dr. G. S. Mahobia and Dr. J. P. Misra for their consistent help, encouragement and valuable discussions during entire period of my research work. It would not have been possible without their utmost involvement and invaluable efforts. They motivated me to pursue research problems and the need for persistent effort to accomplish the goal. I am truly indebted to them. They are the real definition of the best teacher, being friendly and behind for all the problems of not only mine but all the students.

Besides my supervisors, I would like to thank my RPEC members Prof. A. K. Jha, Prof. S. K. Sinha and Dr. J. K. Singh for their insightful comments and encouragement. I sincerely thank, Prof. Santosh Kumar Head of the department of Mechanical Engineering and the former heads Prof. A. P. Harsha, Prof. A. K. Jha and Prof. A. K. Agrawal for providing all the research facilities to successfully accomplish my research in the department. I have deep sense of gratitude to all the faculty members of the Department of Mechanical Engineering, IIT (BHU), especially Prof. V. K. Srivastava, Prof. Rajnesh Tyagi, Prof. Rajesh Kumar, Prof R. K. Gautam and Dr. M.Z. Khan for their cooperation and inspiration.

I praise and thank Rabindra for the enormous amount of help and support throughout these years. I am thankful to my all friends Arun, Ram, Vishnu, Sushil, Rabindra, Homendra, Siddharth, Tripurari, Ashish and seniors Sanjay sir, Bipin sir, Rizvi sir, Sakendr sir, Parshant sir, Harikishor sir and Ashish sir for their constant encouragement, making joyful and memorable life in moments of happiness and troubles at IIT (BHU), Varanasi. I would also like to thank my juniors Dheeraj, Dharmendra, Niwas, Akash, Sanjay and Nitesh for their support.

Dozens of people have helped and taught me immensely at IIT (BHU) Varanasi. I'd like to thank my colleagues from CAM lab, Welding Lab and Production Lab. I am also thankful to all the lab, workshop and office staff specially Mr. Lalji, Mr. Ajay, Mr. Akash and Mr. J. K. Sinha for their help and encouragement.

The world is going through some unprecedented times as the normal has been upended by the arrival of the deadly coronavirus pandemic. People across the globe are battling with Covid-19. Many people who are locked at home like us are doing their part also by helping others in many ways. But, others like doctors, soldiers, teachers, bank employees, office staff, railway employees, social volunteers etc. who were working outside to fulfil our requirements and taking care of the affected ones by risking their lives. I would like to thank them for their service towards humanity. Also, I would like to express my deepest condolences to those who lost their lives during this pandemic. Hope can always help pull people out of the most difficult of times. It is a powerful force and can prove to be a source of reassurance. Hence, I am immensely optimistic that very soon we will win this battle.

Last but not the least, I would like to express my deepest gratitude to my entire extended family, my parents and my wife Suman for giving my life in the first place, for educating me, for unconditional support and encouragement to pursue my interest during the most difficult times of this journey. I've been lucky to have their confidence, patience, pride, nurturing and love throughout my life. I would also like to thank Rahul, Purnima, Babita, Deepika ji and my lovely son Advik for their love, support and encouragement during the most difficult times and it would not have been even half sweet without them.

Finally, I wish to thank my friends and the persons who directly or indirectly helped in this journey but their names have not been mentioned here.

Manish Deo
(Manish Deo)

List of Tables

Table 2.1: Shielding gases and their properties for a weld joint.....	29
Table 3.1: Procured Materials.....	65
Table 3.2: Chemical composition (Wt. %) of A572 gr.50 and filler material	65
Table 3.3: Chemical composition (Wt. %) of 316L SS and ER 316L filler material	67
Table 3.4: A572 gr. 50 Parameters According Taguchi's L ₁₆	71
Table 3.5: SS 316L Parameters According Taguchi's L ₁₆	71
Table 4.1: L ₁₆ orthogonal array and corresponding levels and obtained Ultimate Tensile strength (UTS), Yield Stress(YS) and heat inputs(HI)	77
Table 4.2: Taguchi Analysis: UTS versus Current, gas flow rate, weld speed.....	81
Table 4.3: Analysis of Variance for means for UTS, using Adjusted SS for Tests.....	83
Table 4.4: Table 4.4: Macro graph of all A572 gr 50 samples	87
Table 4.5: Average Hardness variation in various zones of HAZ and WB.....	109
Table 5.1: L ₁₆ orthogonal array and corresponding levels and obtained Average Ultimate Tensile strength (UTS), Yield stress (YS) and Heat inputs (HI)	117
Table 5.2: Taguchi Analysis: UTS versus Current, gas flow rate, weld speed.....	119
Table 5.3: Analysis of Variance for UTS, using Adjusted SS for Tests.....	121
Table 5.4: Macro structure of 316L SS welded joints	127
Table 5.5: Average hardness in WB, UMZ, HAZ and BM	143

List of Figures

Figure 1.1: Classification of welding process.....	2
Figure 1.2: Schematic diagram of the interaction of heat source with metal and regions of the weld.....	5
Figure 1.3: Tempering colures of steel due to heat.....	6
Figure 1.4: Application of HSLA in automobile	11
Figure 1.5: Weld failures in HAZ	11
Figure 1.6: Application of 316L SS in a) Boat hulls, b) Discolouration, c) Intergranular cracking, d)Pitting, e) Distortion, f) failure in HAZ.....	12
Figure 1.7: Stress development a) During welding, b) After welding.....	16
Figure 2.1: Schematic diagram of Gas Metal Arc Welding.....	20
Figure 2.2: Weld pool shapes for travel speed of a) Slow, b) Intermediate & c) Fast....	25
Figure 2.3: Weld back a) Without humping bead at weld speed- 1.77 m/min, b) With humping bead at weld speed-2.01 m/min	26
Figure 2.4: Effect of weld speed on 201 stainless steel	27
Figure 2.5: Weld bead contour and penetration pattern on Mild Steel.....	28
Figure 2.6: Effect of Gas mixture on spatter generation.....	30
Figure 2.7: Shielding of 1.5% H ₂ -Ar at current of a) 140A, b) 180A, c) 240A.....	32
Figure 2.8:a)Short-Circuit Metal Transfer, b)Globular metal transfer, c)Spray Transfer	40
Figure 2.9: Plot of Heat-Transfer Efficiency to Base Metal Vs Electrode-Speed	41
Figure 2.10: Temperature distributions around a metallic arc butt weld.....	42
Figure 2.11: Graph showing the change in thermal conditions	45
Figure 2.12: Structure of a) Fusion weld joint, b) Structure of Weld metal	46
Figure 2.13: Optical micrograph of weld joint	46
Figure 2.14: Sub-divisions of HAZ for low carbon steel welds and temperature	49

Figure 2.15: Schematic of CGHAZ formations	50
Figure 3.1: Flow-chart for the scheme of work	63
Figure 3.2: Experiment setup used for GMAW	68
Figure 3.3: Schematic view of steps followed during fabrication process	69
Figure 3.4: Steps followed during fabrication a) Cleaned base b) Milled specimen, c) Joint configuration, d) Fixed 10° torch angle, e) Start of Welding, f) GMAW.....	69
Figure 3.5: Setting the limits of welding parameters a) Current for A572, b) Gas flow rate for A572, c) Current for 316L, d) Gas flow rate for 316L.....	70
Figure 3.6: Location of extracted samples for various characterizations	72
Figure 3.7: Location of hardness measurement across welded joints.....	73
Figure 3.8: Base and Welded Tensile test specimens of 316L SS and A572 gr. 50.....	74
Figure 4.1: Main effect plot for S/N ratio	79
Figure 4.2: Main effect plot of means.....	80
Figure 4.3: Taguchi Analysis: UTS (MPa) Vs Current (A), Gas flow rate (l/min) and weld speed (mm/sec).....	81
Figure 4.4: Taguchi Analysis: YS (MPa) Vs Current (A), Gas flow rate (l/min) and weld speed (mm/sec).....	82
Figure 4.5: Taguchi Analysis: HI (kJ/cm) Vs Current (A), Gas flow rate (l/min) and weld speed (mm/sec).....	82
Figure 4.6: The interaction plot for ultimate tensile strength	83
Figure 4.7: The interaction plot for Yield Stress	84
Figure 4.8: The interaction plot for Heat Input.....	85
Figure 4.9: Heat Input effect and sample number.....	86
Figure 4.10: Weld bead nomenclature	88
Figure 4.11: Optical micrograph of sample 09: Fusion Zone and Heat affected zone	

containing CGHAZ, FGHAZ, ICHAZ, TZ and BM	90
Figure 4.12: Optical micrograph of A572 at 200X (Insert shows perlite at 1000X).....	91
Figure 4.13: Optical micrograph of sample 05 with different morphology found in Weld joint microstructure	92
Figure 4.14: Schematic illustration of propagation path for cleavage crack in the steel grains with ferrite side plate and intragranular acicular ferrite	93
Figure 4.15: The formation of martensite, bainite etc.	96
Figure 4.16: Optical micrograph of Sample no. 02 at 200X: Heat input- 6.05 kJ/cm, Current- 100 A, Weld speed- 2.5 mm/sec and Gas flow rate-14 l/min	99
Figure 4.17: Optical micrograph of Sample no. 05 at 200X: Heat Input- 7.64 kJ/cm, Current -135 A, Voltage- 17 V, Gas flow rate- 10 l/min, Weld speed- 2.5 mm/sec	100
Figure 4.18: Optical micrograph of Sample no. 12 at 200X: Heat Input: 10.21 kJ/cm, Current -170 A, Voltage -17 V, Gas flow rate-19 l/min, Weld speed-2.5 mm/sec	101
Figure 4.19: Optical micrograph of Sample no. 09 at 200X: Heat Input: 6.63 kJ/cm, Current-170 A, Voltage-16 V, Gas flow rate-10 l/min, Weld speed-3.75 mm/sec	102
Figure 4.20: Optical micrograph of Sample no. 13 at 200X: Heat Input- 6.22 kJ/cm, Current- 205 A, Voltage- 16 V, Gas flow rate-10 l/min, Weld speed- 5.0 mm/sec	103
Figure 4.21: Effect of Current on microstructure of a)WB, b)CGHAZ and c)FGHAZ	104
Figure 4.22: Effect of Gas flow rate on microstructure of a) WB, b) CGHAZ and c) FGHAZ	105
Figure 4.23: Effect of Weld speed on microstructure on microstructure of a) WB, b) CGHAZ and c) FGHAZ	106
Figure 4.24: Hardness distribution 2 mm below the surface for Sample no. 11.....	108
Figure 4.25: Average Hardness in Weld Metal, CGHAZ, FGHAZ and Base metal	110
Figure 4.26: Line diagram of Average Hardness in zones of Welded joint	111

Figure 4.27: Fractured BM and tensile specimen at different current levels of Sample no. 02 (I-100 A), 05 (I-135 A), 12 (I-170 A) and 15 (I-205 A).....	112
Figure 4.28:Strength Variation for base material and welded samples as per L ₁₆ array	113
Figure 4.29: Line diagram showing Strength variation among samples	114
Figure 4.30: Effect of current: SEM micrograph of fractured tensile specimen	115
Figure 4.31: Effect of weld speed on SEM micrograph of fractured tensile specimen	115
Figure 5.1: Main effect plot for S/N ratio	118
Figure 5.2: Main effect plot of means.....	118
Figure 5.3: Taguchi Analysis: UTS Vs Current, Gas flow rate and weld speed	120
Figure 5.4: Taguchi Analysis: YS Vs Current, Gas flow rate and weld speed.....	120
Figure 5.5: Taguchi Analysis:HI Vs Current(A), Gas flow rate(l/min) and Weld speed (mm/sec)	121
Figure 5.6: The interaction plot for Ultimate Tensile Strength (UTS)	122
Figure 5.7: The interaction plot for Heat Input.....	123
Figure 5.8: The interaction plot for Yield Stress	124
Figure 5.9: The bar chart for Heat Input	124
Figure 5.10: Sample S02 at weld speed 2.0 mm/sec HI of 5.43 kJ/cm	126
Figure 5.11: Optical micrograph of 316L stainless steel (Base material).....	129
Figure 5.12: Pseudo-binary diagram of the Fe [Cr–Ni]eq for AISI 316L	130
Figure 5.13: Optical micrograph of Zones in welded joints a) Sample no S12 (200X), b) Weld bead morphology (1000X).....	131
Figure 5.14: Optical micrograph of Sample S02 at 200X: Heat Input- 5.43 kJ/cm, Current- 95 A, HAZ Width- 40 μm	133
Figure 5.15: Optical micrograph of Sample S05 at 200X: Heat Input: 6.85 kJ/cm, Current- 120 A, HAZ Width- 100 μm	134

Figure 5.16: Optical micrograph of Sample S12 at 200X: Heat Input- 8.77 kJ/cm, Current- 145 A, HAZ Width- 158 μm	135
Figure 5.17: Optical micrograph of Sample S02 at 200X: Heat Input- 21.28 kJ/cm, Current- 170 A, HAZ Width- 289 μm	136
Figure 5.18: HI effect on δ ferrite content for sample S04 (2.71kJ/cm), S02 (5.43 kJ/cm), S05 (6.85 kJ/cm) and S16 (21.28 kJ/cm).....	136
Figure 5.19: Optical micrograph of Sample S09 at 200X and 1000X: Heat Input- 5.68 kJ/cm, Current- 145 A, HAZ Width- 100 μm	137
Figure 5.20: Effect of welding speed on microstructure of a)WB, b)HAZ and c)BM .	138
Figure 5.21: Current effect on δ ferrite content for sample S02(95 A), S05(120 A) and S09(145 A), S15(170 A)	139
Figure 5.22: Effect of gas flow rate on microstructure of a) WB, b) HAZ and c) BM	140
Figure 5.23: Gas flow rate effect on δ ferrite content for sample S09(10 l/min), S02 (13 l/min) and S15(16 l/min), S12(19 l/min)	140
Figure 5.24: Effect of weld speed on microstructure of a) WB, b) HAZ and c) BM ...	141
Figure 5.25: Weld Speed effect on δ ferrite content for sample S01(1.5 mm/sec), S02 (2 mm/sec) and S9(2.5 mm/sec), S13(3 mm/sec)	142
Figure 5.26: Hardness distribution for Sample S08 (I-120 A, f-19 l/min & 2.5 mm/s)	144
Figure 5.27: Hardness distribution for different HI in S02, S05, S12 and S16	145
Figure 5.28: Hardness distribution in Weld Bead, UMZ, HAZ and BM.....	146
Figure 5.29: Effect of Heat Input on UTS and TS Vs Sample no.	148
Figure 5.30: UTS and YS variation for each sample number.....	149
Figure 5.31: SEM image of a fractured tensile specimen of 316L SS base material ...	151
Figure 5.32: Effect of current on SEM micrograph of fractured tensile specimen.....	152

List of Symbols

1. Abbreviations

Cr Chromium

Fe Iron

Cu Copper

Mg Magnesium

μm Micrometer

V Vanadium

I Current

V Voltage

S Weld speed

f Gas flow rate

ANOVA Analysis of variance

S/N Signal to noise ratio

μ Mean

σ Standard Deviation

2. Acronyms

BM	Base material
WB	Weld bead
HAZ	Heat affected zone
FZ	Fusion zone
MIG	Metal inert gas welding
GMAW	Gas metal arc welding
HSLA	High strength low alloy steel
ASS	Austenitic stainless steel
SS	Stainless steel
%EL	Percentage Elongation
RPM	Revolution Per Minute
CGHAZ	Coarse grain heat affected zone
ICHAZ	Inter critical heat affected zone
FGHAZ	Fine grain Heat Affected Zone
UTS	Ultimate Tensile Strength
YS	Yield Strength