


Solidification Characteristics of Die Cast A308 Aluminium Alloy Under Different Vibratory Conditions

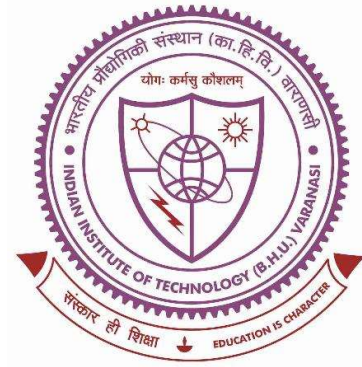

Thesis submitted in partial fulfilment for the
award of degree

Doctor of Philosophy

By

Siddharth Yadav

DEPARTMENT OF MECHANICAL ENGINEERING
INDIAN INSTITUTE OF TECHNOLOGY
(BANARAS HINDU UNIVERSITY)
VARANASI-221005

15131019

2023

CERTIFICATE

It is certified that the work contained in the thesis titled “*Solidification Characteristics of Die Cast A308 Aluminium Alloy Under Different Vibratory Conditions*” by “*Siddharth Yadav*” has been carried out under our supervision and this work has not been submitted elsewhere for a degree.

It is further certified that the student has fulfilled all the requirements of Comprehensive Examination, Candidacy and SOTA for the award of Ph.D. Degree.



Administrative Supervisor
Dr. Santosh Kumar

Department of Mechanical Engineering
Indian Institute of Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA.
प्राध्यापक / Professor

यांत्रिक अभियान्त्रिकी विभाग/Deptt. of Mechanical Engg.
भारतीय प्रौद्योगिकी संस्थान/Indian Institute of Technology
(का०हि०वि०/B.H.U.)
वाराणसी-२२१००५/Varanasi-221005



Academic Supervisor
Dr. Satya Prakash Tewari

Department of Mechanical Engineering
Indian Institute of Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA.
प्राध्यापक / Professor

यांत्रिक अभियान्त्रिकी विभाग/Deptt. of Mechanical Engg.
भारतीय प्रौद्योगिकी संस्थान/Indian Institute of Technology
(का०हि०वि०/B.H.U.)
वाराणसी-२२१००५/Varanasi-221005



Co-Supervisor
Dr. Jayant Kumar Singh
Department of Metallurgical Engineering
Indian Institute of Technology
(Banaras Hindu University)
Varanasi – 221005, INDIA
सह-आचार्य

Associate Professor
धातुकीय अभियान्त्रिकी विभाग
Départment of Metallurgical Engg.
भारतीय प्रौद्योगिकी संस्थान (काशी हिन्दू विश्वविद्यालय)
Indian Institute of Technology (Banaras Hindu University)

DECLARATION BY THE CANDIDATE

I, "SIDDHARTH YADAV", certify that the work embodied in this thesis is my own bona fide work and carried out by me under the supervision of "PROF. SANTOSH KUMAR, PROF. SATYA PRAKASH TEWARI (Retired), and Dr. JAYANT KUMAR SINGH", from JULY 2015 to DECEMBER 2022, at the "DEPARTMENT OF MECHANICAL ENGINEERING", Indian Institute of Technology (BHU), Varanasi. The matter embodied in this thesis has not been submitted for the award of any other degree/diploma. I declare that I have faithfully acknowledged and given credits to the research workers wherever their works have been cited in my work in this thesis. I further declare that I have not wilfully copied any other's work, paragraphs, text, data, results, etc., reported in journals, books, magazines, reports dissertations, theses, etc., or available at websites and have not included them in this thesis and have not cited as my own work.


Date: 12/06/2023

Place: Varanasi


(SIDDHARTH YADAV)

CERTIFICATE FROM THE SUPERVISORS

This is to certify that the above statement made by the candidate is correct to the best of our knowledge.



Academic Supervisor

Dr. Satya Prakash Tewari
Department of Mechanical
Engineering
Professor

यांत्रिक अभियान्त्रिकी विभाग/Deptt. of Mechanical Engg.
भारतीय प्रौद्योगिकी संस्थान (का०हि०वि०/B.H.U.)
Indian Institute of Technology (Banaras Hindu University)
Varanasi - 221005, INDIA
वाराणसी-२२१००५/Varanasi-221005



Administrative Supervisor

Dr. Santosh Kumar
Department of Mechanical
Engineering
Professor

यांत्रिक अभियान्त्रिकी विभाग/Deptt. of Mechanical Engg.
भारतीय प्रौद्योगिकी संस्थान (का०हि०वि०/B.H.U.)
Indian Institute of Technology (Banaras Hindu University)
Varanasi - 221005, INDIA
वाराणसी-२२१००५/Varanasi-221005



Co-Supervisor

Dr. Jayant Kumar Singh
Department of Metallurgical
Engineering
Professor

धातुकीय अभियान्त्रिकी विभाग/Deptt. of Metallurgical Engg.
भारतीय प्रौद्योगिकी संस्थान (काशी हिन्दू विश्वविद्यालय)
Indian Institute of Technology (Banaras Hindu University)
Varanasi - 221005, INDIA
सह-आचार्य
Associate Professor
वाराणसी-२२१००५/Varanasi-221005



Professor and Head

Department of Mechanical Engineering
Indian Institute of Technology
(Banaras Hindu University)
Varanasi - 221005, INDIA

यांत्रिक अभियान्त्रिकी विभाग/Deptt. of Mechanical Engg.
भारतीय प्रौद्योगिकी संस्थान/Indian Institute of Technology
(का०हि०वि०/B.H.U.)
वाराणसी-२२१००५/Varanasi-221005

COPY RIGHT TRANSFER CERTIFICATE

Title of the Thesis: Solidification Characteristics of Die Cast A308 Aluminium Alloy Under Different Vibratory Conditions

Name of the Student: Siddharth Yadav

Copyright Transfer

The undersigned hereby assigns to the Indian Institute of Technology (Banaras Hindu University) Varanasi all rights under copyright that may exist in and for the above thesis submitted for the award of the "*DOCTOR OF PHILOSOPHY*".

Date: 12/06/2023

Place: Varanasi



(SIDDHARTH YADAV)

Note: However, the author may reproduce or authorize others to reproduce material extracted verbatim from the thesis or derivative of the thesis for author's personal use provided that the source and the Institute's copyright notice are indicated.

*I Would like to dedicate
this
Thesis
To My
Beloved Family*

PREFACE

Over the past few decades, automotive and aerospace industries have increased the use of Al-Si alloys due to the ever-increasing demand for weight reduction to achieve higher performance efficiency. It is well-known that the mechanical properties mainly depend on physical (porosity, density, and cooling rate) and metallurgical properties (grain structure, dendritic and columnar zones, size of α -Al phases, shape, size, and segregation of eutectic Si, and distribution of the constituent phases).

Porosity defect (shrinkage and gas) is one of the main problems in Al-Si cast alloys. Shrinkage occurs due to improper solidification, and gas pores arise due to the entrapped gases. Hydrogen is the only gas that is appreciably soluble in aluminium, but the solubility of hydrogen in liquid aluminium is much more than in solid form.

To get superior metallurgical properties several grain refinement techniques were practised, like chemical, physical, and post-processing techniques, e.g., rolling, extrusion, and heat treatment.

In the chemical method, the grain modifiers, e.g., Sr, B, Ti, Sr, B, change the shape of the eutectic silicon from a plate-type to a fibrous form. However, they require a substantial amount to be effective; it contaminates and makes it an antigreen technology.

As an alternative to chemical methods, physical (ultrasonic, electromagnetic, and mechanical) means were explored using high-intensity shearing action. The ultrasonic vibration gained early popularity due to its ability to refine both α Al and eutectic morphology and encourage degassing to reduce porosity. Although the practical application of these techniques is not much, similarly, electromagnetic vibration requires large amounts of current and costly equipment such as superconducting magnets and

magnetic coils. The complete arrangement confines the casting shape and size. Making it less viable for an industrial requirement.

Besides that, the mechanical vibration method is easily practicable, economical, eco-friendly, and effective. As a result, this technique is more advantageous than others. In 1878 Chernov discovered in his early studies that mechanical vibration during solidifying steel led to the refinement of austenite. Mechanical vibration uses external forces to create forced convection, reducing porosity and improving density. It eliminates structural heterogeneity, speeds up crystallisation, generates more nucleation sites and alters the morphology of metallurgical characteristics to a more favourable one.

It can be introduced in two different ways, i.e., horizontally or vertically. So far, over the period, vertical vibration has been commonly used by most researchers as it removes columnar grains directly from the wall. The method shows vulnerability while increasing amplitude beyond the critical level due to possible splashing, limiting the method's applicability to smaller and lightweight castings. On the contrary, horizontal mould vibration is relatively uncommon, safe, robust, and suitable for heavier components also, this method can serve industrial requirements more aptly than any other method. As a result, this method was chosen for the present study.

The present dissertation “Solidification characteristics of die-cast A308 aluminium alloy under different vibratory conditions” consists of seven chapters.

Chapter 1 provides a brief introduction to Al alloy, its application in the automotive sector, the merits of Al alloy, research background and the aim and objective of the work.

Chapter 2 This chapter addresses the literature survey which deals with information about castability issues of Al-Si alloys including its characteristics, metallurgical aspects, process parameters of casting, effect of alloying elements, mechanism and classification

of grain refinement methods and the effect of frequency and amplitude variation on the metallurgical and mechanical properties of castings. The extensive literature review and gaps in the literature are discussed at the end.

Chapter 3 This chapter addresses the experimental techniques employed in developing the in-house set-up, chemical characterization, melting, and pouring of the A308 alloy. It also discusses the physical, metallurgical, and mechanical characterization experiments. Characterization techniques, like optical microscopy, scanning electron microscopy, energy-dispersive X-ray spectroscopy and X-ray diffraction, are also discussed.

Chapter 4 In this chapter, the low-frequency range mould vibration of the die-cast A308 alloy is discussed. To determine the performance of the as-cast and vibrated cast samples, the physical, metallurgical, and mechanical properties of the samples were analyzed. Therefore, the chapter is divided into four sections (a) Physical properties, (b) Metallurgical properties, (c) Mechanical properties, and (d) Fractography. The chapter concludes with a summary of the results of the physical, metallurgical, and mechanical tests.

Chapter 5 This chapter focuses on medium frequency range mould vibration on the die-cast A308 aluminium alloy. Physical, metallurgical, and mechanical characteristics were evaluated to analyse the performance of the as-cast and vibrated-cast samples. Therefore, the chapter has also been divided into four sections. (a) Microstructural observation, (b) Density and porosity evaluation, (c) Mechanical properties, and (d) Fractography. The chapter concludes with a summary of the physical, metallurgical, and mechanical results.

Chapter 6 This chapter focuses on high-frequency range mould vibration on the die-cast A308 alloy. Samples that were cast as cast and vibrated cast were analyzed based on

their physical, metallurgical, and mechanical properties. In light of this, the chapter has been divided into four sections. (a) Physical properties, (b) Metallurgical properties, (c) Mechanical properties and (d) Fractography. The chapter concludes with a summary of the microstructure, physical, and mechanical results.

Chapter 7 This chapter summarizes the effects of low, medium, and high-frequency range mould vibrations. Comparative analysis is performed under three sections (a) Physical properties, (b) Metallurgical properties, and (c) Mechanical properties, the chapter ends with concluding remarks, and the scope for future work.

ACKNOWLEDGEMENTS

I am using this opportunity to express my sincere thanks and gratitude beyond words to my supervisors, Prof. Santosh Kumar, Prof. Satya Prakash Tewari, and Dr. Jayant Kumar Singh for their consistent help, encouragement and valuable discussions during entire period of my research work. It would not have been possible without their utmost involvement and invaluable efforts. They motivated me to pursue research problems and the need for persistent effort to accomplish the goal. I am truly indebted to them. They are the real definition of the best teacher, being friendly and behind for all the problems of not only mine but all the students.

Besides my supervisors, I would like to thank my RPEC members Prof. A. K. Jha, Prof. S. K. Sinha and Dr. J. K. Singh for their insightful comments and encouragement. I sincerely thank, Prof. Santosh Kumar Head of the department of Mechanical Engineering and the former heads Prof. A. P. Harsha, Prof. A. K. Jha and Prof. A. K. Agrawal for providing all the research facilities to successfully accomplish my research in the department. I have deep sense of gratitude to all the faculty members of the Department of Mechanical Engineering, IIT (BHU), especially Prof. V. K. Srivastava, Prof. Rajnesh Tyagi, Prof. Rajesh Kumar, Prof R. K. Gautam and Dr. M.Z. Khan for their cooperation and inspiration.

I praise and thank Rabindra for the enormous amount of help and support throughout these years. Thanks to my friends Subhash Chandra Ram, Nitesh, Manik, Rabindra, Manish, Ashutosh, Meraj, and seniors Sanjay Sir, Bipin Sir, Rizvi Sir, Sakendra Sir for their constant support.

I would also thank my juniors Pankaj, Sankata, Abhimanyu, Adarsh, Ravi, Mithilesh, etc for their support.

Last but not the least, I would you like to thank my family especially my parents, my wife and son Arjun for their constant encouragement, making joyful and memorable life in moments of happiness and troubles at IIT (BHU), Varanasi. I would also like to thank my juniors Dharmendra, Niwas, Akash, and Nitesh for their support.

Dozens of people have helped and taught me immensely at IIT (BHU) Varanasi. I'd like to thank my colleagues from CAM lab, Welding Lab and Production Lab. I am also thankful to all the lab, workshop and office staff specially Mr. Lalji, Mr. Ajay, Mr. Akash Mishra and Mr. J. K. Sinha for their help and encouragement.

The world is going through some unprecedented times as the normal has been upended by the arrival of the deadly coronavirus pandemic. People across the globe are battling with Covid-19. Many people who are locked at home like us are doing their part also by helping others in many ways. But, others like doctors, soldiers, teachers, bank employees, office staff, railway employees, social volunteers etc. who were working outside to fulfil our requirements and taking care of the affected ones by risking their lives. I would like to thank them for their service towards humanity. Also, I would like to express my deepest condolences to those who lost their lives during this pandemic. Hope can always help pull people out of the most difficult of times. It is a powerful force and can prove to be a source of reassurance. Hence, I am immensely optimistic that very soon we will win this battle.

Last but not the least, I would like to express my deepest gratitude to my entire extended family, especially my parents for giving my life in the first place, for educating me, for unconditional support and encouragement to pursue my interest during the most difficult times of this journey. I've been lucky to have their confidence, patience, pride, nurturing and love throughout my life. I would also like to thank my father, mother,

sisters, my wife and my lovely son Arjun for their love, support and encouragement during the most difficult times and it would not have been even half sweet without them.

Finally, I wish to thank my friends and the persons who directly or indirectly helped in this journey but their names have not been mentioned here.

Siddharth

(SIDDHARTH YAD)

LIST OF TABLES

Table 2.1: Melting point and heat of fusion of few typical die-casting alloy base metals.....	10
Table 2.2: Hypoeutectic Al-Si alloy phase precipitation sequence	26-27
Table 3.1: Frequency and amplitude range selection	54
Table 3.2: Chemical composition of A308 Alloy by wt.%	56
Table 4.1: The density of A308 alloy at (0-10) Hz frequencies	68
Table 4.2: The cooling rate of casting at (0-10) Hz frequencies	68
Table 4.3: Effect of (0-10) Hz frequency on morphology of metallurgical features....	73
Table 4.4: Effect of (0-10) Hz frequency on mechanical properties of castings	78
Table 5.1: The cooling rate of casting at (0-50) Hz frequencies	87
Table 5.2: Morphological features of eutectic silicon particles at (0-50) Hz frequencies of vibration	88
Table 5.3: Average α -Al grain size, dendrite arm spacing (DAS), and porosity of A308 Al-alloy under (0-50) Hz frequencies.....	88
Table 5.4: Density measurement of A308 alloy under (0-50) Hz frequencies.....	91
Table 6.1: The density of A308 alloy under (0-150) Hz frequencies	100
Table 6.2: The cooling rate of A308 alloy under (0-150) Hz frequencies	100
Table 6.3: Effect of (0-150) Hz frequencies on the morphology of the metallurgical features	104
Table 6.4: Mechanical properties of cast samples under (0-150) Hz frequencies.....	108

LIST OF FIGURES

Figure 2.1: Base metal cooling pattern	09
Figure 2.2: Effect of vibration on dendrite fragmentation and multiplication of nucleation sites.....	13
Figure 2.3: Effect of metal flow on dendrite multiplication and generation of new nucleation sites.....	13
Figure 2.4: Progression of dendrite formation during solidification.....	14
Figure 2.5: Microporosity as depicted.....	14
Figure 2.6: Al-Si equilibrium diagram.....	15
Figure 2.7: Solidification structure of hypoeutectic Al-Si alloy.....	16
Figure 2.8: Classification of the grain refinement methods.....	20
Figure 2.9: Graphical representations of the contact angle and surface tension forces are shown with the formation of a solid (s) spherical cap on a substrate.....	24
Figure 2.10: Demonstrating the fluctuation of $f(\theta)$ with θ where $f(\theta)$ is equal to $(2 - 3 \cos\theta + \cos 3\theta)/4$	25
Figure 2.11: A schematic showing the microstructure of a hypoeutectic Al-Si, a) Three basic components (grains, Al dendrites, DAS, and eutectic Si);b) Perfect grain refiner particles (squares) with one-to-one one lattice matching to Al atoms (points); c) Poor lattice matching.....	27
Figure 2.12: Hypoeutectic aluminium-silicon alloys with different silicon morphologies comparison: (a) unmodified; (b) Sr-modified (300 ppm Sr); and (c) Sb-modified (2400 ppm Sb).....	27
Figure 2.13: As-cast 319 alloys contain two Cu-rich phases: (a) Eutectic Al_2Cu and (b) Blocky Al_2Cu	28
Figure 3.1: Plan of research work.....	49

Figure 3.2: Casting trials on mild steel closed die, open die, and conical frustum die.....	51
Figure 3.3: Die and fixture making.....	51
Figure 3.4: Calibration of setup, dry run and amplitude measurement.....	53
Figure 3.5: Casting set-up (a) horizontal mechanical vibration M/C and (b) Schematic Diagram	55
Figure 3.6: Melting, die preheating, die & fixture assembly and pouring.....	57
Figure 3.7: Cast components under a low-frequency (0-10) Hz range.....	57
Figure 3.8: Cast components under a medium-frequency (0-50) Hz range.....	57
Figure 3.9: Cast components under a high-frequency (0-150) Hz range.....	57
Figure 3.10: Sample extraction location for physical, metallurgical and mechanical test samples.....	58
Figure 3.11: Density measuring instrument.....	59
Figure 3.12: Sample sectioning for microstructural examination.....	61
Figure 3.13: Tensile test specimens.....	62
Figure 3.14: Microhardness specimen.....	63
Figure 4.1: Microstructure of A308 alloys (a) Stationary condition, (b) 2 Hz, (c) 4 Hz, (d) 6 Hz, (e) 8 Hz, and (f) 10 Hz.....	70
Figure 4.2: Eutectic silicon refinement of A308 alloys (a) stationary condition 0 Hz, (b) 2 Hz, (c) 4 Hz, (d) 6 Hz, (e) 8 Hz, and (f) 10 Hz.....	71
Figure 4.3: X-ray diffraction pattern of A308 alloy.....	75

Figure 4.4: EDS spectra of A308 Al Alloy at (a) 8 Hz, and (b) 10 Hz frequencies	76
Figure 4.5: Typical engineering stress-strain diagram at (a) stationary condition, (b) 2 Hz, (c) 4 Hz, (d) 6 Hz, (e) 8 Hz and (f) 10 Hz frequencies.....	77
Figure 4.6: Vickers hardness graph of A308 alloy under (a) stationary condition, (b) 2 Hz, (c) 4 Hz, (d) 6 Hz, (e) 8 Hz and (f) 10 Hz frequencies.....	79
Figure 4.7: Fractography images of tensile test samples (a) stationary condition, (b) 2 Hz, (c) 4 Hz, (d) 6 Hz, (e) 8 Hz and (f) 10 Hz.....	81
Figure 5.1: Optical micrographs of A308 alloys cast under (a) 0 Hz; (b) 20 Hz; (c) 30 Hz; (d) 40 Hz; (e) 50 Hz frequencies.....	86
Figure 5.2: SEM micrographs of A308 alloys cast under different frequencies: (a) 0 Hz; (b) 20 Hz; (c) 30 Hz; (d) 40 Hz; (e) 50 Hz frequencies.....	87
Figure 5.3: Comparative study of microstructural features of A308 alloy cast under stationary and vibratory conditions: (a) grain size and DAS; (b) shape factor and Average roundness; (c) aspect ratio and Average area of eutectic Si; (d) porosity.....	89
Figure 5.4: X-ray diffraction pattern of A308 alloy.....	90
Figure 5.5: SEM image of (a) EDS spectrum of A308 alloy (b) Al-Fe-Si, (c) Al ₂ Cu, (d) Al-Si, and (e) Si intermetallic phases.....	90
Figure 5.6: Interdendritic porosity of as-cast samples: (a) shrinkage porosity at 0 Hz; (b) shrinkage porosity at 20 Hz; (c) available microporosity under vibration at 30 Hz.....	92
Figure 5.7: Engineering stress-strain diagram of tensile test samples under (0-50) Hz frequencies.....	92

Figure 5.8: Comparison of mechanical properties under stationary versus vibratory conditions: (a) microhardness and elongation; (b) UTS and YS.....	94
Figure 5.9: Fractographs of tensile test specimens at (a) 0 Hz, (b) 20 Hz, (c) 30 Hz, (d) 40 Hz, and (e) 50 Hz frequencies.....	95
Figure 6.1: Microstructure of A308 alloys cast under (a) 0 Hz (Stationary condition); (b) 75 Hz; (c) 100 Hz; (d) 125 Hz; and (e) 150 Hz frequencies.....	101
Figure 6.2: SEM micrographs of A308 alloys prepared under (a) 0 Hz (stationary condition); (b) 75 Hz; (c) 100 Hz; (d) 125 Hz; and (e) 150 Hz frequencies.....	102
Figure 6.3: X-ray diffraction pattern of A308 alloy.....	105
Figure 6.4: EDS analysis of A308 alloy cast under the as-cast condition.....	106
Figure 6.5: Pile-up of dislocations at grain boundary.....	107
Figure 6.6: Engineering stress-strain diagram of A308 alloy's cast samples prepared under (a) 0 Hz (stationary condition); (b) 75 Hz; (c) 100 Hz; (d) 125 Hz; and (e) 150 Hz frequencies.....	109
Figure 6.7: SEM Fractographs of A308 alloy tensile test samples cast under (a) 0 Hz (stationary condition); (b) 75 Hz; (c) 100 Hz; (d) 125 Hz; and (e) 150 Hz frequencies.....	112
Figure 7.1: Comparison of physical properties under low / medium / high frequency ranges.....	118
Figure 7.2: Comparison of metallurgical properties under low /medium /high frequency ranges	118

Figure 7.3: Comparison of mechanical properties under low / medium / high frequency ranges.....119

LIST OF SYMBOLS

1. Abbreviations

Cu	Copper
Al	Aluminium
Si	Silicon
Mg	Magnesium
Fe	Iron
Ti	Titatnium
Zn	Zinc
μm	Micrometer mm
Al_2Cu	Copper Intermetallic
wt.%	Weight Percentage

2. Acronym

K_B	Boltzmann's Constant
θ	Contact Angle
ΔS	Entropy Change
η	Heat-transfer efficiency
G	Gibbs free energy
H	Enthalpy
N	Nucleation rate

R	Critical Nucleus Size
DAS	Dendrite Arm Spacing
%EL	Percentage Elongation
HV	Microhardness
SDAS	Secondary Dendritic Arm Spacing
OM	Optical microscope
SEM	Scanning electron microscope
HV	Microhardness
UTS	Ultimate Tensile Strength
YS	Yield Strength